



PRODUCT DIMENSIONS


SIDE VIEW

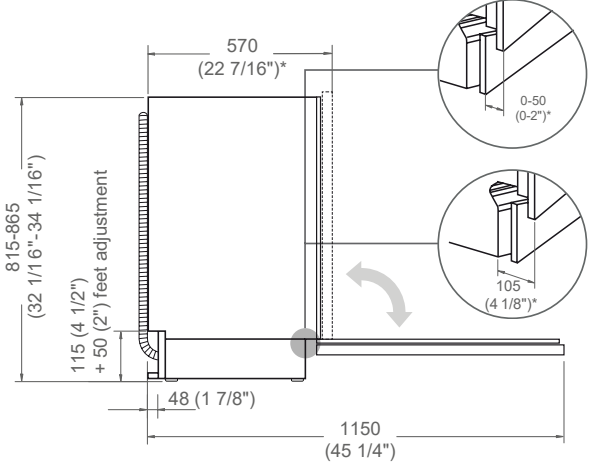

FRONT VIEW

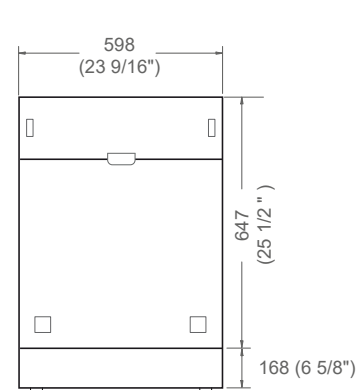

TOP VIEW




Drain hose is provided with the unit.


* Including a 20 (13/16") thick kitchen cabinet front panel. A minimum space of 10 (3/8") is required between the plinth and the panel.

CUTOUT DIMENSIONS


SIDE VIEW



FRONT VIEW

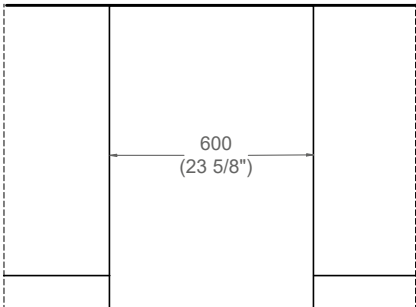


TOP VIEW

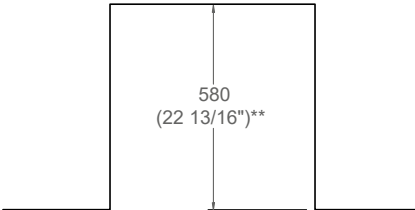


**Cabinet depth shown includes a 20 (13/16") thick kitchen cabinet front panel.

ELECTRICAL & WATER CONNECTION




A properly-grounded, horizontally-mounted electrical receptacle should be installed according to this drawing.



To connect the water mains to the water inlet valve thread, use the 3/4" threaded connector and 1500 (59 1/16") water inlet hose (supplied).

TOP VIEW

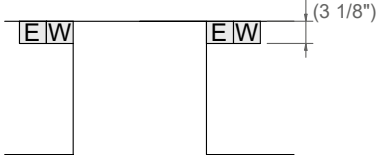

FRONT VIEW




Connections placement must be located on either side of the cutout.

INSTALLATION REQUIREMENTS

Follow local codes & ordinances for drain requirements. Install a 300-1000 (11 13/16" - 39 3/8") high drain loop to prevent backflow. Drain hose is 1400 (55 1/8") long. Items will not wash properly if an extension drain hose longer than 4 m (157 1/2") is used.

Dimensions are in millimeters unless otherwise specified.

CUSTOM PANEL & BASEBOARD

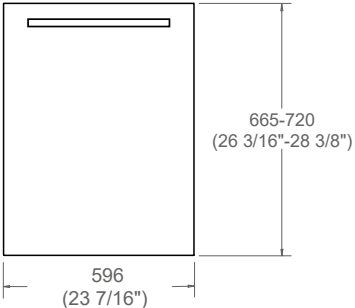

Door tension can be adjusted to accommodate custom panel weights from 5 kg (11 lb) to 7 kg (15 lb). Suggested panel thickness is 20 (13/16").

The height of a custom plinth must be within the range of 80-135 (3 1/8"-5 5/16"). Max height can be increased by an additional 50 (2") if feet are raised.